

Datasheet

2.5" SATA SSD

3MG5-P series

- 2.5" SATA III solution for industrial field
- 7mm height mechanical design
- High IOPS with 3D NAND solution
- L³ architecture extends lifespan
- RAID Protection
- iData Guard for abnormal power failure
- Built-in thermal sensor
- iCell technology for data protection (optional)
- iSMART disk health monitoring



Introduction

3MG5-P is Innodisk's first product series supported 3D NAND flash. Innodisk 2.5" SATA SSD 3MG5-P is characterized by L³ architecture and RAID engine with the latest SATA III (6.0GHz) ID204 controller. Innodisk's exclusive L³ architecture is L² architecture multiplied LDPC (Low Density Parity Check). L² (Long Life) architecture is a 4K mapping algorithm that reduces WAF and features a real-time wear leveling algorithm to provide high performance and prolong lifespan. Innodisk 2.5" SATA SSD 3MG5-P is equipped RAID engine to offer additional level of data protection for exceptional reliability.


2.5" SATA SSD

3MG5-P series

Drawing

Contact us for more information about the 2.5" SATA SSD 3MG5-P

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

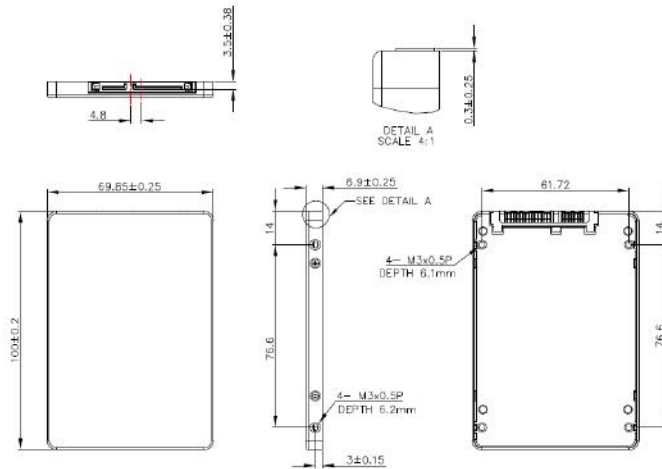

Specifications

Interface	SATA III
Flash Type	3D MLC
Flash P/E Cycle Limit	3,000
Capacity	128GB~512GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	560/500
Max. Power Consumption	3.6 W (5V x 720 mA)
Thermal Sensor	Supported
External DRAM Buffer	Supported
iCell	Supported
ATA Security	Supported
S.M.A.R.T.	Supported
Dimension (WxLxH)	69.85 X 100.10 X 6.9 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City,
Taiwan (R.O.C.)
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-40-3045-400
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2017 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

20171117

Ordering Information

Operation Temp.	128GB	256GB	512GB
Standard Grade (0°C ~ +70°C)	DGS25- A28D21CCAQG(P)	DGS25- B56D21CCAQG(P)	DGS25- C12D21CCAQG(P)

innodisk

www.innodisk.com