

Datasheet

Industrial SD Card 3ME3

- SD 3.0 interface
- High performance
- Power fail Management
- BCH ECC algorithm implement



Introduction

Innodisk 3ME3 is an industrial-grade SD card solution with an integrated industrial controller, which is designed for embedded applications. With enhanced flash technologies and a powerful configurable BCH ECC engine, SD 3ME3 can achieve high-speed data transfer rates.

Innodisk industrial SD 3ME3 provides a wide range of capacities from 8GB to 128GB with MLC NAND Flash, and is fully compliant with SD3.0 and SD2.0 specifications.

Innodisk industrial SD 3ME3 are specifically designed for industrial PC and embedded applications for high performance. With its low power consumption and the above mentioned features, Innodisk industrial SD 3ME3 can be applied for industrial automation, SBC (single-board computer), medical equipment, infotainment, and mobile applications.

Industrial SD Card 3ME3

Contact us for more information
about the Industrial SD Card 3ME3.

Innodisk is a service-driven provider of industrial embedded flash storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan
Tel: +886-2-77033000
Email: sales@innodisk.com


Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-40-3045-400
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2017 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

20170801

Diagram

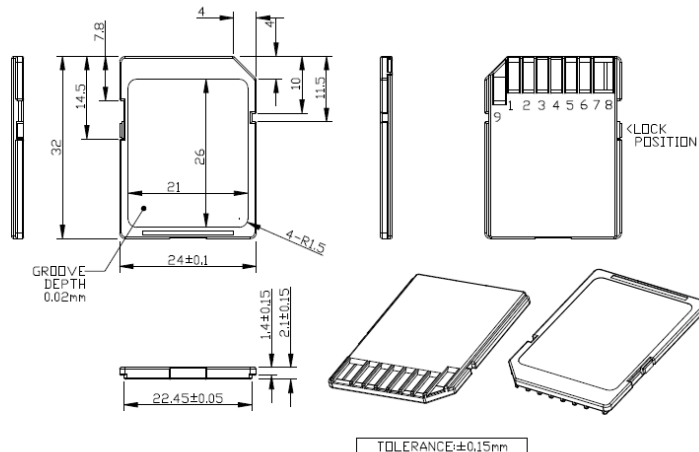

Specifications

Interface	SD 3.0
Flash Type	MLC
Capacity	8GB~128GB
Max. Channels	1
Sequential R/W (MB/sec, max.)	80/46
Max. Power Consumption	0.56W (3.6V x 158mA)
Thermal Sensor	-
Extended DRAM buffer	-
H/W Write Protect	√
ATA Security	-
S.M.A.R.T.	-
Dimension (WxLxH)	24 X 32.0 X 2.1 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

Ordering Information

Operation Temp.	8GB	16GB	32GB	64GB	128GB
Standard Grade (-20°C ~ +85°C)	DESDC-08GS02BC1SC	DESDC-16GS02BC1SC	DESDC-32GS02BC1SC	DESDC-64GS02BC1SC	DESDC-A28S02BC1SC
Industrial Grade (-40°C ~ +85°C)	DESDC-08GS02BW1SC	DESDC-16GS02BW1SC	DESDC-32GS02BW1SC	DESDC-64GS02BW1SC	DESDC-A28S02BW1SC

